

Flat Solar Panel


BL-40W

BRITE LED TECH PRODUCT

40w Monocrystalline Flat Solar Panel has sturdy anodized aluminium alloy frame. Size of 610 x 534 x 35mm with a weight of 4.5kg, has 3.2mm tempered glass which has a allowable hail load of a steel ball at 1 meter, has a wire junction box on rear of panel. All specifications as per below and comes as 1 panel per box



BRITE LED TECH PTY LTD	
www.briteledtech.com	
S A 1 0 0 4 2 8 7 9	
Model:	BL-40W
Max System Voltage:	1000 V
Stand Test Condition:	1000W/m ² , AM1.5, 25°C
Max Power:	40 W
Max Power Voltage:	18 V
Max Power Current:	2.23 A
Open Circuit Voltage:	21.6 V
Short Circuit Current:	2.44 A
Net Weight:	4.5 KG
Size(L/B/T):	610*534*35mm
Temperature Range:	-40°C to +85°C
Frame Materials:	Aluminum
Output Tolerance:	± 5 %

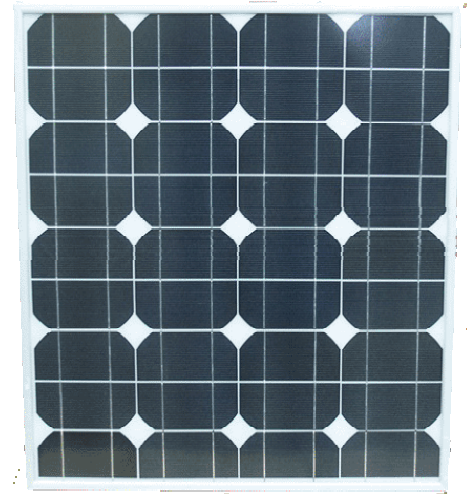

Ideal for charging batteries, commonly used for 4wd owners to recharge starter packs or auxiliary battery, Charging of Caravan battery when minimal drain has occurred after lighting used at night, garden shed battery charging where you may not have 240v lighting and simply have a battery you wish to keep charged up which supplies power for your lights which get used on a daily occurrence, large perimeter electric fence battery charging, garden lighting battery charging. Always calculate your expected power usage, battery size to determine the best solar panel for your needs.

If panels are used as they are meant to be used and looked after then really your panels should last a lifetime without a doubt though we offer a warranty anyway
5yr structural warranty under normal operating conditions
25 year replacement warranty if reduced power output of panels to 80%
